




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04N 7/24	A1	(11) International Publication Number: WO 00/25517 (43) International Publication Date: 4 May 2000 (04.05.00)
(21) International Application Number: PCT/EP99/07500 (22) International Filing Date: 5 October 1999 (05.10.99) (30) Priority Data: 98203638.6 27 October 1998 (27.10.98) EP (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventor: VAN WILLIGEN, Engelbertus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: DEGUELLE, Wilhelmus, H., G.; Internationaal Oc- trooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eind- hoven (NL).		(81) Designated States: CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: BROADCAST NETWORK WITH INTERACTIVE SERVICES

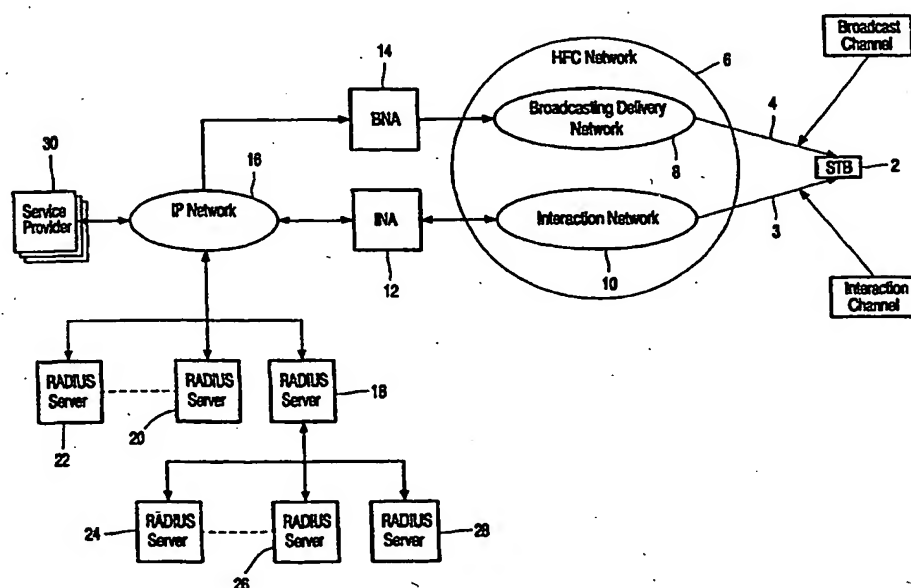

(57) Abstract

In an interactive broadcast system, signals transmitted by a service provider (30) are passed via a gateway (12) to a subscriber terminal (2). In order to gain access to services, the subscriber terminal (2) transmits an authorization request message via the gateway (12) to the RADIUS server (18). This RADIUS server (18) transmits in response to the authorization request message an authorization challenge message to the subscriber terminal (2). In return the subscriber terminal responds to the challenge message with a challenge response. This challenge response is checked by the RADIUS server (18) and, if correct, the RADIUS server (18) transmits a message to the gateway to give the subscriber terminal access to the service.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Broadcast network with interactive services.

The present invention relates to a broadcast network comprising an information server coupled to a plurality of subscriber stations for transmitting broadcast signals to the subscriber stations, the broadcast network further comprises a return channel for transmitting information from the subscriber terminal to an head-end, the broadcast network further
5 comprises authentication means for authorizing the access of the subscriber terminal to interactive services

The present invention also relates to a subscriber terminal, a gateway and a method.

A broadcast network according to the preamble is known from ETS 300802,
10 Digital Video Broadcasting (DVB); Network independent protocols for DVB interactive services, EBU/CENELEC/ETSI-JTC, November 1997.

Presently, interactive services are introduced in several types of broadcast networks, such as DVB-Satellite, DVB-Cable and DVB-Terrestrial. For enabling these interactive services, a return channel has introduced in order to transmit information from a
15 subscriber terminal to a head-end. The information server can be present in the head end, but it may also a remote server which is connected to the head-end. The subscriber terminal can e.g. be a set top box or a cable modem. The return channel can be a connection via the Public Switched telephone Network, via a Cable return channel or even a satellite return channel.

An operator of the information server requires reliable authentication,
20 authorization and subsequent billing of users using the information server. In present systems this authorization is done using the Point to Point Protocol (PPP) which is described in RFC 1661 and RFC 1994. PPP is not suitable for providing for authentication and authorization for different services, because PPP only provides for authentication and authorization of a communication link.

25

The object of the present invention is to provide a broadcast network according to the preamble in which authorization and authentication for multiple services is possible.

To achieve said objective, the broadcast network according to the present invention is characterized in that the subscriber terminal comprises authorization transmitting means for transmitting authorization request messages to an authorization server, the authorization server being arranged for checking the entitlement of the subscriber to services to be provided by the information server, and in that the authorization server is arranged for enabling the subscriber to access said services.

By introducing the authorization transmitting means in the subscriber terminal and adding authorization server to which request messages can be sent. The authentication server then requests an authentication message from the subscriber terminal. After the identity of the subscriber and the entitlement to the requested service has been verified, the authorization server enables the use of said services by said subscriber terminal. The above process can be carried out for each different service.

It is observed that in RFC 2138 the so-called radius protocol is disclosed. In this protocol, the authorization transmitting means are not included in the subscriber terminal, but they are present in the server to which a subscriber logs on for accessing the service.

An embodiment of the present invention is characterized in that the information server is coupled to the subscriber terminals via a gateway, and in that the authorization server is arranged for enabling the subscriber to access said services by transmitting a message to the gateway to grant said subscriber access to said services.

An easy way of enabling access to the services is to send a command message to a gateway informing the gateway that certain services for the authorized subscriber stations have to be passed. This gateway can be present in the head end.

A further embodiment of the invention is characterized in that said message comprises information about at least one source IP address from which IP packets are passed to the subscriber station.

A suitable way to enable services is to inform the gateway that IP packets having a particular destination address have to be passed to the subscriber terminal which has requested. In some systems it will also be needed that IP packets from the subscriber terminal is passed to a host with a particular destination address. This destination address may be the same as the source address, but this is not a necessity.

The present invention will now be explained with reference to the drawings.

Fig. 1 shows a block diagram of the communication network according to the invention.

Fig. 2 shows a protocol stack to be used in a subscriber terminal according to the invention.

Fig. 3 shows a flow diagram of a successful attempt of a subscriber terminal to access services provided by the information server 30.

Fig. 4 shows a flow diagram of a failing attempt of a subscriber terminal to access services provided by the information server 30.

In the broadcast network according to Fig. 1, a subscriber terminal 2, which can be a set top box (STB) or a cable modem, is connected via two logical channels 3 and 4 of a Hybrid Fiber Coax network to a gateway 14 (Broadcast Network adapter) and to a gateway 12 (Interaction Network Adapter).

The first logical channel is an unidirectional broadcast channel, which is part of a Broadcasting Delivery Network 8, carries video, audio and data. The second logical channel is a bi-directional interaction channel, which is part of an Interaction Network 10. This second logical channel is intended for interaction purposes. It is formed by a return interaction path and a forward interaction path. The forward interaction path may be embedded into the broadcast channel. It is possible that the forward path of the interaction channel is not required in some simple implementations that make only use of the broadcast channel for carrying data.

Physically, the broadcasting delivery network and interaction network are laid over one HFC network i.e. the STB has one RF connection to the HFC network.

The Interaction Network Adapter (INA) 12 implements the functionality of a Network Access Server (NAS) for allowing the subscriber terminal 12 (STB or Cable Modem) to access an IP network 16 over the HFC network 8. It embeds the interactive (IP) data in the interaction channel 3. The Broadcast Network Adapter (BNA) 14 embeds the (IP) data in the broadcast channel 4.

According to the present invention authorization servers 18, 20 and 22 are connected to the IP network 16. These authorization servers will further to be referred to as RADIUS servers, because they operate according to the RADIUS protocol (RFC 2138). The subscriber terminal 2 transmits an authorization request message via the INA 12 to one of the RADIUS servers 18, 20 and 22. These RADIUS servers transmit an access challenge message to the subscriber terminal 2 in order to check the identity of the subscriber terminal. In

response to said access challenge message, the subscriber terminal 2 transmits a second access request message which carries a response to the challenge message to authenticate itself. If the information carried by the second access request message is regarded as correct, the RADIUS server submits configuration information to the INA (or BNA) necessary to deliver the service to the STB in question.

Optionally, a RADIUS server can act as a proxy client to other RADIUS servers or other kinds of authentication servers. This can be seen in Fig. 1, by the connection of further radius servers 24, 26 and 26 to the radius server 18.

As explained above, authentication, authorization and accounting is based on the RADIUS protocol as this is the standard for authentication, authorization and accounting within the Internet community. RADIUS supports authentication, authorization and accounting on a per-session basis. Furthermore different applications running in parallel are supported, because each application can initiate the transmission of request messages to a RADIUS server. Also different accounting policies e.g. one for web-browsing and another for IP-telephony can be supported, because the RADIUS server can transmit different configuration messages to the INA 12 and/or BNA 14.

Due to the present of different RADIUS servers, it is possible that each ISP or ASP does its own authentication, authorization and accounting.

The architecture shall allow STB's which doesn't contain functionality for this architecture to enter the cable network. However, security measures shall be taken that they can not access (accountable) services for which they have to be authenticated and authorized. The architecture is secure i.e. users can not circumvent authentication, authorization and accounting e.g. by hacking the STB or cable modem, because all sensitive information can be stored on a secure smart card.

The proposal is to add RADIUS functionality to the Set-Top-Box and Cable Modem i.e. it looks like a RADIUS client is built into the STB or CM. This can be done by adding RADIUS functionality to the STB and CM middle ware.

The STB RADIUS client present in the subscriber terminal 2, communicates with a RADIUS proxy inside the INA 12 which on its turn communicates with the RADIUS server 18, 20 or 22 of the ISP or ASP in question. The INA 12 includes an IP filter and functionality for accounting.

The subscriber terminal 2 uses a SmartCard which contains for each user an ID, password and a CHAP secrecy. At set-up of the connection, this information is used to authenticate and authorize the subscriber terminal 2 by the RADIUS server 18, 20 or 22.

The INA 12 contains a RADIUS security module for securing the connection with the RADIUS server. The RADIUS security module is used to add to each RADIUS message a cryptographic message digest of the payload of the message, so that the RADIUS server 18, 20 or 22 can verify that the message is generated by an authorized INA and not tampered with.

The data base of the RADIUS server contains for each subscriber terminal, the ID, password and CHAP security data stored on the SmartCard. Furthermore, it contains for each INA the RADIUS security data for authenticating the RADIUS messages coming from the INA in question and vice versa.

The RADIUS client inside the STB implements all necessary functionality for RADIUS authentication, authorization and accounting. It is capable of generating and handling all RADIUS messages i.e. Access-Request, Access-Accept, Access-Reject, Access-Challenge and the accounting messages: Accounting-Request and Accounting-Response plus the necessary message attributes.

RADIUS messages will only be exchanged on the Interaction Channel between the STB and INA.

The subscriber terminal 2 knows the IP address of the RADIUS server, it needs for authorization, authentication and accounting. If this is not the case, the STB uses the IP broadcast address: 255.255.255.255 and the RADIUS proxy of the INA 12 fills in the IP address of the default RADIUS server. (RADIUS uses the well known UDP port number 1812 for RADIUS authentication and authorization and 1813 for RADIUS accounting.) The

RADIUS message attribute: 'NAS-Port' can be used to address the different applications running in the subscriber terminal 2.

The RADIUS message attribute 'NAS-IP-Address' is used to inform the designated RADIUS server of the IP address of the RADIUS client present in the subscriber terminal 2.

Fig. 2 shows the protocol stack to be implemented in the subscriber terminal 2. Below the application layer 32, the RADIUS client layer 36 is present. This RADIUS layer is placed on top of the UDP/TCP layers 38 and 40. It can be part of e.g. a MediaHighWay adaptation layer 34. More than one application in the subscriber terminal 2 can make use of the RADIUS functionality, so that for each application a RADIUS session can be executed i.e.

authentication, authorization and accounting can be done. Below the TCP or UDP layer, the IP layer and the MAC layer are present.

In the flowgraph according to Fig. 3, the interactions, needed for authenticating, authorizing and accounting, between the subscriber terminal 2, the INA 12, the RADIUS server are shown.

This sequence is executed after a STB has successfully signed-on, on the MAC layer in step 56. In step 58, the subscriber terminal 2 sends a DHCP request message to the INA 12 in order to obtain an IP address. In step 60, the INA 12 replies by transmitting DHCP reply message containing an IP address to be used by the subscriber terminal 2.

In order to access a service, the subscriber terminal 2 sends a RADIUS access request message to the INA 12 in step 62. In step 64 the INA 12 forwards this request message to the appropriate RADIUS server e.g. 18. In response to said RADIUS access request message, the RADIUS server transmits in step 66 a RADIUS challenge message to the INA 12, which passes this message in step 68 to the subscriber terminal 2 to authenticate it. The subscriber terminal 2 replies in step 70 with transmitting (via the INA 12, step 72) a RADIUS access request message containing the RADIUS challenge response to the RADIUS server 18.

The RADIUS server 18 checks the challenge response message and if the challenge response is correct, the RADIUS server 18 replies in step 74 with a RADIUS access accept message. This RADIUS access accept message signals the INA 12 and, in step 76, the subscriber terminal 2 that this subscriber terminal 2 is given access to the requested service.

Before the requested service is started, the subscriber terminal 2 sends in steps 78 and 80 a RADIUS accounting request message via the INA 12 to the RADIUS server 18 in order to turn on the accounting for the requested service. The RADIUS server 18 will respond in step 82 by transmitting a RADIUS accounting response message to the INA 12. This message will adjust the IP-filter 84 of the INA 12 in such way that the IP-datagrams of the requested service can be forwarded by the INA 12 to the subscriber terminal. Furthermore, the INA 12 forwards the RADIUS accounting response message to the subscriber terminal 2. In response to the RADIUS accounting response message, the subscriber terminal 2 starts the service.

When the requested service has finished, the subscriber terminal 2 transmits in steps 90 and 92 a RADIUS accounting request message to turn off accounting, via the INA 12 to the RADIUS server 18. The RADIUS server 18 responds to the message 92 with an RADIUS accounting response 94 which is transmitted to the INA 12 and which is passed as message 98 to the subscriber terminal. When the RADIUS accounting response is received by

the INA 12 from the RADIUS server 12, the IP-filter is adjusted in such way that the IP datagrams of the service in question is blocked by the INA.

It is observed that the above is only an example of how the interaction between the STB, INA and RADIUS server can be done. Many variations can be introduced on this sequence.

The flowgraph according to Fig. 4 shows the interactions between the subscriber terminal 2, the INA 12 and the RADIUS server 18 for the case that the subscriber terminal 2 is rejected:

The steps up to and including step 72 are exactly the same as is shown in Fig. 3.

10. When the challenge response transmitted by the subscriber terminal is not correct, the RADIUS server replies with a RADIUS access reject message 100 which is transmitted to the INA 12 and passed to the subscriber terminal 2 to signal the INA 12 and the subscriber terminal 2 is not allowed to access the service.

After some time the subscriber terminal 2 to enter the network again. This can be handy for the case that the access permissions of the STB has changed in the meantime. For example, the user has called the service center of the access service provider to update its permissions. This repeated re-tries are indicated in Fig. 4 by the "Do" and "While Not

Accepted" blocks 106 and 104. As long as access of the subscriber terminal 2 is not authorized, The IP-filter inside the INA will block passing information from the information provider 30 to the subscriber terminal 2. Also passing of information from the subscriber terminal 2 to the information provider 30 is blocked.

20 With PPP, only the PPP "pipe" (i.e. connection) is authenticated and authorized. Furthermore, the accounting used in PPP is the same for all types of services i.e. it can not support different accounting policies for different services. In the direct-IP architecture, the authentication, authorization and accounting can be done on a per service basis.

25 By using an IP-filter and by doing accounting outside the STB, the proposed architecture is expected to be secure i.e. users can not circumvent authentication, authorization and accounting by using an "phony" STB. The IP-filter will keep out data of unauthorized STB's. The IP-filter will be controlled by the RADIUS messages from the RADIUS server in question.

30 The proposed architecture can support homogeneous networks with cable modems and STB's from third parties. It is observed that that the proposed architecture also works with PPP

Acronyms

ASP	Access Service Provider.
BNA	Broadcast Network Adapter.
CM	Cable Modem.
CRC	Cable Return Channel.
DVS	Digital Video Systems.
HFC	Hybrid Fiber Coax.
INA	Interactive Network Adapter.
IP	Internet Protocol.
ISP	Internet Service Provider.
MAC	Medium Access Control
RADIUS	Remote Authentication Dial In User Service.
RF	Radio Frequency.
STB	Set Top Box.
TCP	Transfer Control Protocol
UDP	User Datagram Protocol.

CLAIMS:

1. Broadcast network comprising an information server coupled to a plurality of subscriber stations for transmitting broadcast signals to the subscriber stations, the broadcast network further comprises a return channel for transmitting information from the subscriber terminal to an head-end, the broadcast network further comprises authentication means for
5 authorizing the access of the subscriber terminal to interactive services, characterized in that the subscriber terminal comprises authorization transmitting means for transmitting authorization request messages to an authorization server, the authorization server being arranged for checking the entitlement of the subscriber to services to be provided by the information server, and in that the authorization server is arranged for enabling the subscriber
10 to access said services.
2. Broadcast network according to claim 1, characterized in that the information server is coupled to the subscriber terminals via a gateway, and in that the authorization server is arranged for enabling the subscriber to access said services by transmitting a message to the
15 gateway to grant said subscriber access to said services.
3. Broadcast network according to claim 2, characterized in that said message comprises information about at least one source IP address from which IP packets are passed to the subscriber station.
20
4. Broadcast network according to claim 2 or 3, characterized in that said services are transmitted using IP packets, and in that said message comprises information about at least one destination IP address to which IP packets from the subscriber station are passed.
- 25 5. Subscriber station for receiving broadcast signals, said subscriber stations being arranged for transmitting information via a return channel to a head-end, characterized in that the subscriber terminal comprises authorization transmitting means for transmitting authorization request messages to an authorization server, the subscriber further being arranged for receiving authorization messages from the authorization server, and in that the

subscriber station is arranged for requesting services from the head-end after receiving a positive authorization message.

6. Gateway for passing information from an information server to at least one subscriber terminal, characterized in that the gateway is arranged for passing authorization request messages from the subscriber terminal to an authorization server, and in that the gateway is arranged for enabling the subscriber to access said services in response to an authorization message received from the authorization server.
7. Method comprising transmitting broadcast signals to at least one subscriber station and transmitting information from the subscriber terminal to an head-end, method further comprises authorizing the access of the subscriber terminal to available services, characterized in that the method comprises transmitting authorization request messages by the subscriber terminal to an authorization server, checking the entitlement of the subscriber terminal to services to be provided and in that the method comprises enabling the subscriber to access said services if the subscriber terminal is entitled.
8. Method according to claim 7, characterized in that the method comprises transmitting information to the subscriber terminals via a gateway, and in that the method comprises enabling the subscriber to access said services by transmitting a message to the gateway to grant said subscriber access to said services.
9. Method according to claim 8, characterized in that said message comprises information about at least one source IP address from which IP packets are passed to the subscriber station.
10. Method according to claim 8 or 9, characterized in that said services are transmitted using IP-packets, and in that said message comprises information about at least one destination IP address to which IP packets from the subscriber station are passed.

1/4

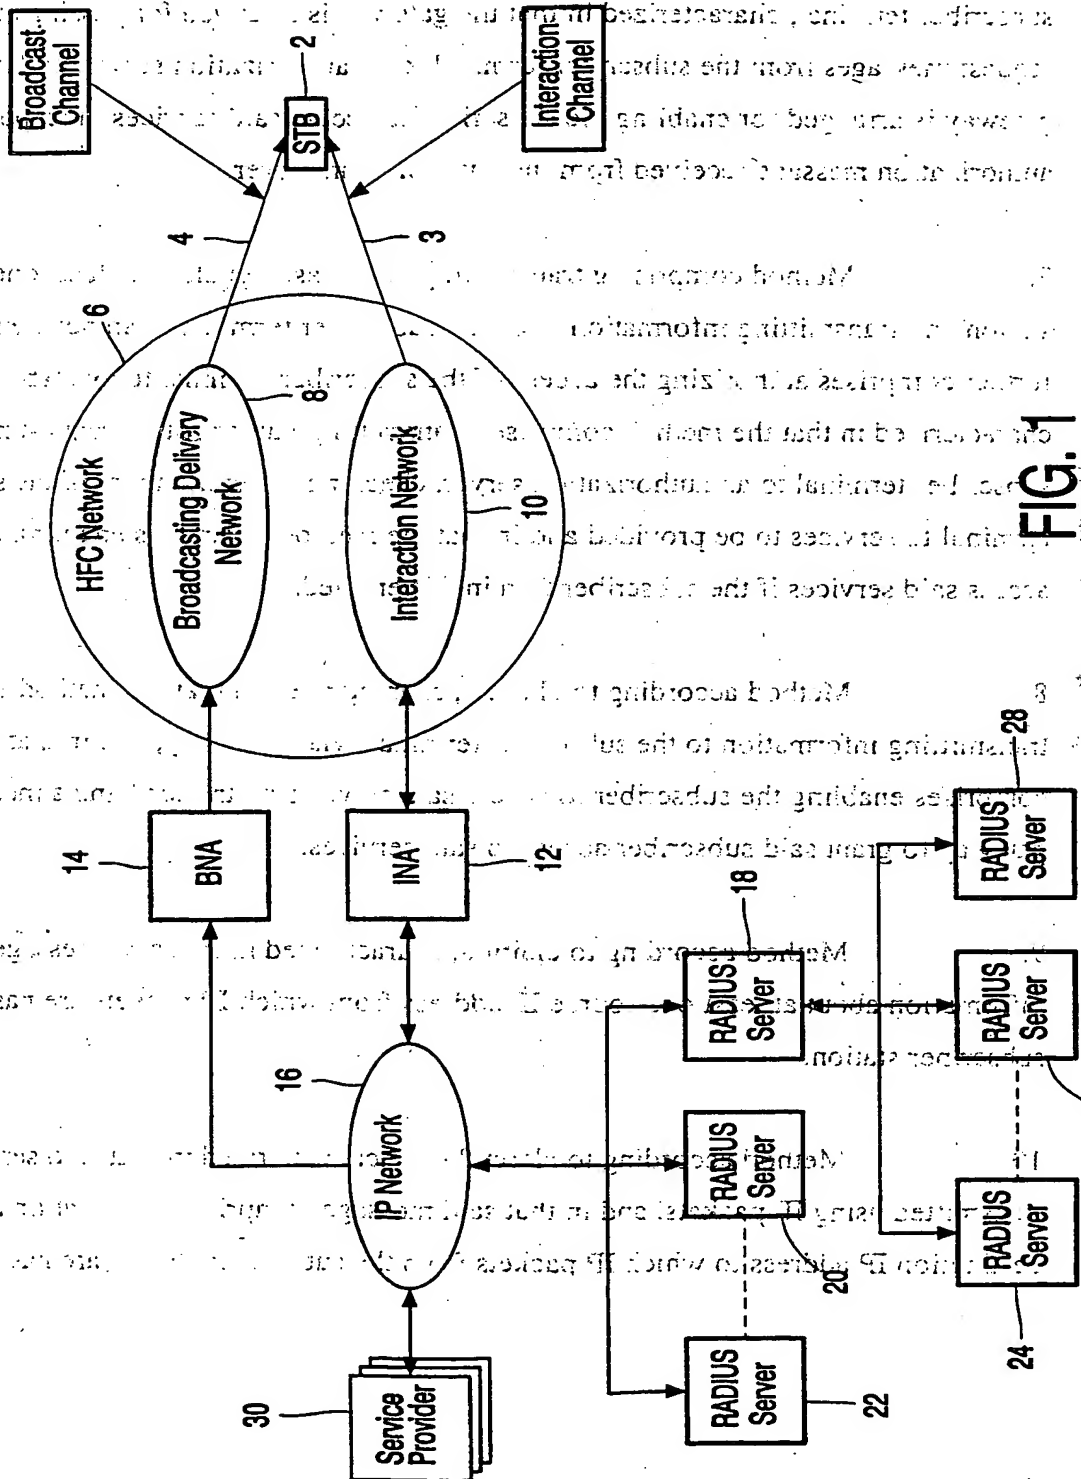


FIG. 1

2/4

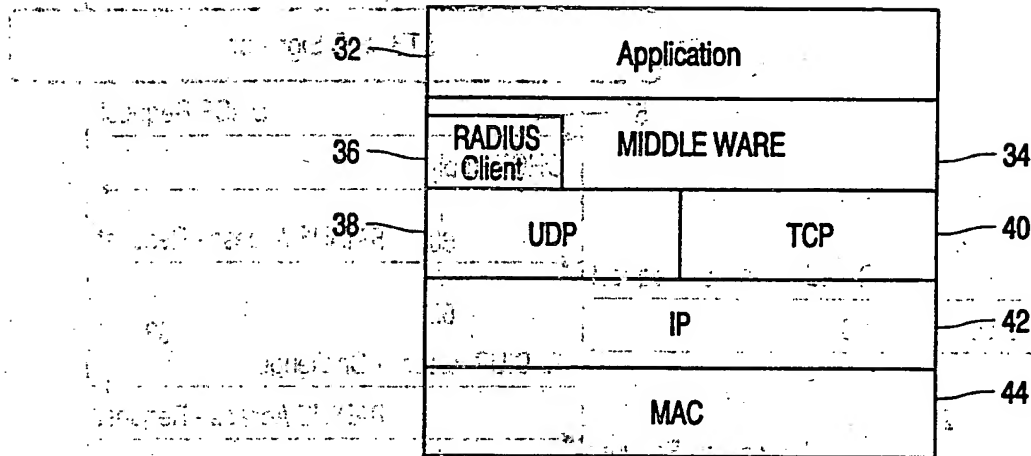


FIG. 2

3/4

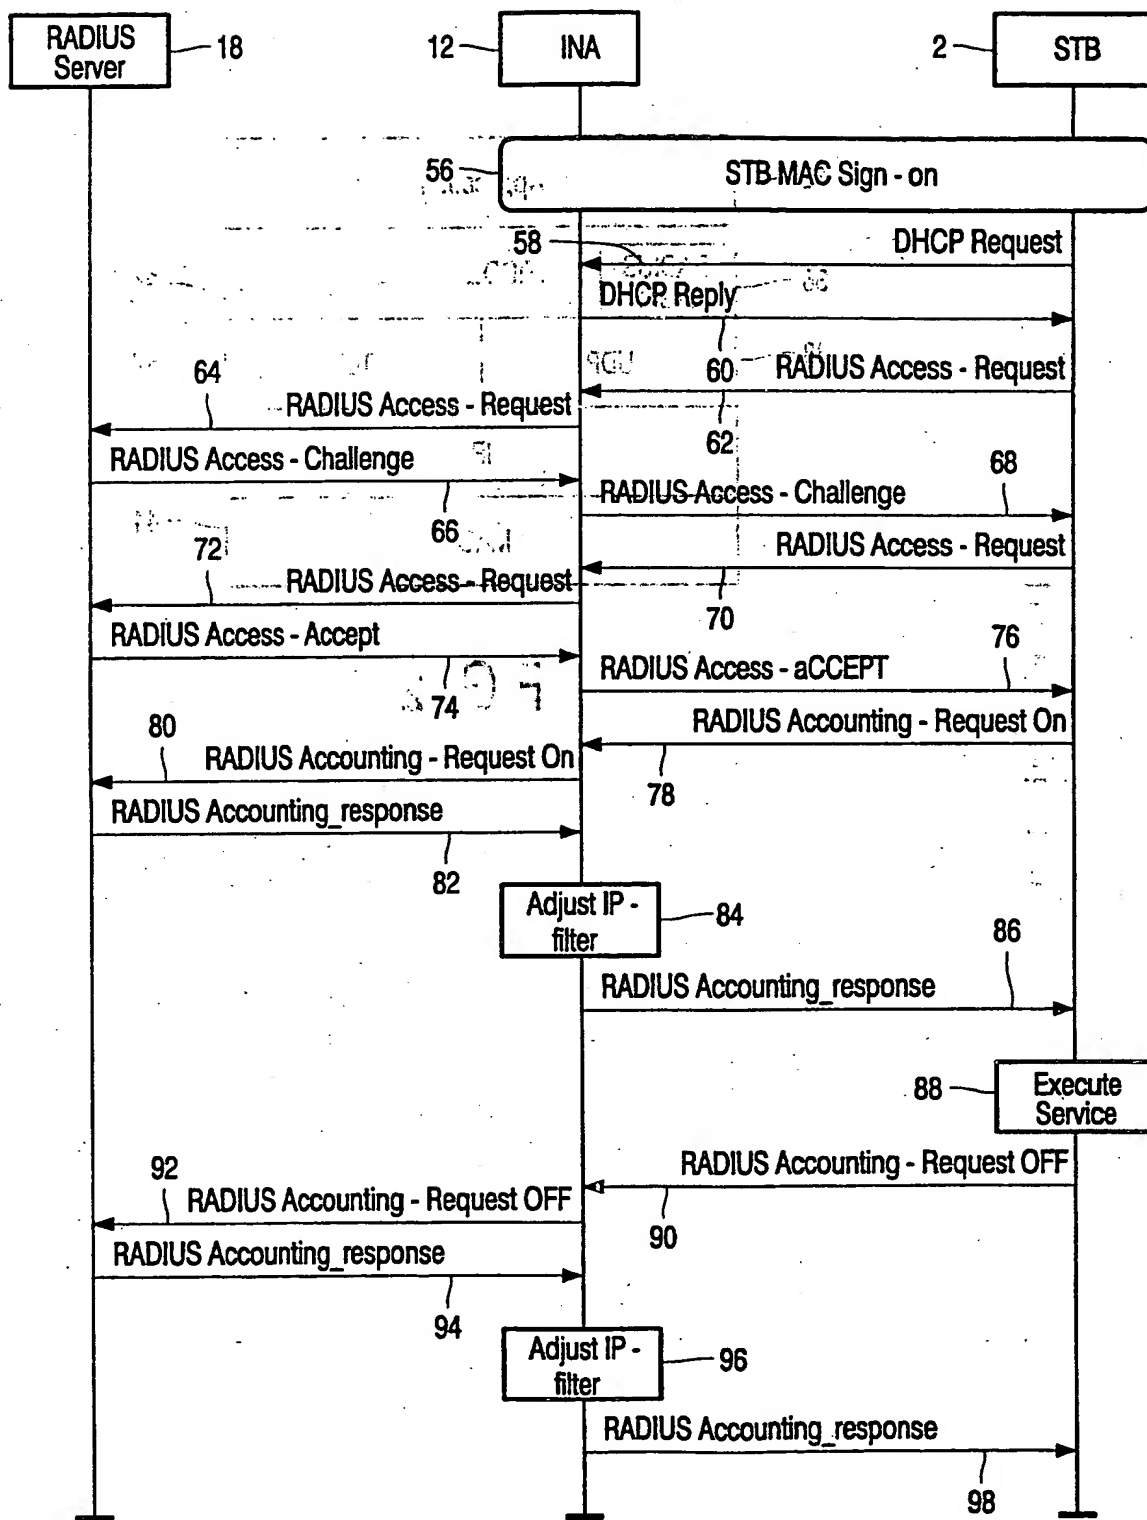


FIG. 3

FIG. 4



INTERNATIONAL SEARCH REPORT

International Application No.
PCT/EP 99/07500

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC-7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 47106 A (WEBTV NETWORKS INC) 11 December 1997 (1997-12-11)	1,2,5-8
A	page 19 -page 26 figures 11,13	3,4,9,10
A	WO 95 15658 A (DISCOVERY COMMUNICATIONS INC) 8 June 1995 (1995-06-08)	1,2,7,8
A	page 16, line 25 -page 17, line 34	1,2,7,8
A	WO 98 43426 A (TULLAYE PIERRE DE ; CANAL PLUS SA (FR); BAYASSI MULHAM (FR); JEZEQU) 1 October 1998 (1998-10-01)	1,2,7,8
A	page 14, line 8 -page 16, line 21	1,7
A	WO 97 50249 A (STENTOR RESOURCE CENTRE INC) 31 December 1997 (1997-12-31)	
	page 17, line 6 -page 18, line 24	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special Categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 January 2000

Date of mailing of the international search report

01/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marie-Julie, J-M

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Application No

PCT/EP 99/07500

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9747106 A	11-12-1997	US 5862220 A	19-01-1999
		AU 3223897 A	05-01-1998
		EP 0900491 A	10-03-1999
WO 9515658 A	08-06-1995	US 5600364 A	04-02-1997
		US 5798785 A	25-08-1998
		AU 693148 B	25-06-1998
		AU 1430695 A	19-06-1995
		BR 9408211 A	26-08-1997
		CA 2177153 A	08-06-1995
		EP 0732031 A	18-09-1996
		EP 0963116 A	08-12-1999
		JP 9510327 T	14-10-1997
		NZ 278185 A	27-04-1998
		AU 1333795 A	19-06-1995
		CA 2177154 A	08-06-1995
		EP 0732027 A	18-09-1996
		JP 9506225 T	17-06-1997
		WO 9515649 A	08-06-1995
WO 9843426 A	01-10-1998	AU 2770497 A	20-10-1998
		NO 994532 A	19-11-1999
		AU 2770697 A	20-10-1998
		AU 7038198 A	20-10-1998
		WO 9843425 A	01-10-1998
		WO 9843162 A	01-10-1998
		WO 9843431 A	01-10-1998
		WO 9843248 A	01-10-1998
		WO 9843165 A	01-10-1998
		WO 9843415 A	01-10-1998
		WO 9843172 A	01-10-1998
		WO 9843433 A	01-10-1998
		WO 9843427 A	01-10-1998
		WO 9843437 A	01-10-1998
		WO 9843167 A	01-10-1998
		WO 9843428 A	01-10-1998
		WO 9843421 A	01-10-1998
		EP 0872798 A	21-10-1998
		EP 0866611 A	23-09-1998
		EP 0866616 A	23-09-1998
		EP 0866613 A	23-09-1998
		EP 0968610 A	05-01-2000
		EP 0968609 A	05-01-2000
		EP 0968607 A	05-01-2000
		EP 0968468 A	05-01-2000
		EP 0968465 A	05-01-2000
		EP 0968602 A	05-01-2000
		EP 0968611 A	05-01-2000
		EP 0968608 A	05-01-2000
		EP 0968469 A	05-01-2000
		EP 0972406 A	19-01-2000
		NO 994529 A	19-11-1999
		NO 994530 A	19-11-1999
		NO 994531 A	19-11-1999
		NO 994533 A	22-11-1999
		NO 994534 A	22-11-1999
		NO 994535 A	22-11-1999
		NO 994536 A	22-11-1999

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/07500

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9843426 A		NO 994537 A	22-11-1999
		NO 994538 A	22-11-1999
		NO 994539 A	22-11-1999
		NO 994540 A	22-11-1999
		NO 994541 A	22-11-1999
		NO 994542 A	22-11-1999
		NO 994543 A	22-11-1999
		NO 994544 A	22-11-1999
		ZA 9703605 A	10-09-1998
WO 9750249 A	31-12-1997	AU 3162397 A	14-01-1998
		CA 2185053 A	25-12-1997
8001-01-01			
8001-01-02			
8001-01-03			
8001-01-04			
8001-01-05			
8001-01-06			
8001-01-07			
8001-01-08			
8001-01-09			
8001-01-10			
8001-01-11			
8001-01-12			
8001-01-13			
8001-01-14			
8001-01-15			
8001-01-16			
8001-01-17			
8001-01-18			
8001-01-19			
8001-01-20			
8001-01-21			
8001-01-22			
8001-01-23			
8001-01-24			
8001-01-25			
8001-01-26			
8001-01-27			
8001-01-28			
8001-01-29			
8001-01-30			
8001-01-31			
8001-02-01			
8001-02-02			
8001-02-03			
8001-02-04			
8001-02-05			
8001-02-06			
8001-02-07			
8001-02-08			
8001-02-09			
8001-02-10			
8001-02-11			
8001-02-12			
8001-02-13			
8001-02-14			
8001-02-15			
8001-02-16			
8001-02-17			
8001-02-18			
8001-02-19			
8001-02-20			
8001-02-21			
8001-02-22			
8001-02-23			
8001-02-24			
8001-02-25			
8001-02-26			
8001-02-27			
8001-02-28			
8001-02-29			
8001-03-01			
8001-03-02			
8001-03-03			
8001-03-04			
8001-03-05			
8001-03-06			
8001-03-07			
8001-03-08			
8001-03-09			
8001-03-10			
8001-03-11			
8001-03-12			
8001-03-13			
8001-03-14			
8001-03-15			
8001-03-16			
8001-03-17			
8001-03-18			
8001-03-19			
8001-03-20			
8001-03-21			
8001-03-22			
8001-03-23			
8001-03-24			
8001-03-25			
8001-03-26			
8001-03-27			
8001-03-28			
8001-03-29			
8001-03-30			
8001-03-31			
8001-04-01			
8001-04-02			
8001-04-03			
8001-04-04			
8001-04-05			
8001-04-06			
8001-04-07			
8001-04-08			
8001-04-09			
8001-04-10			
8001-04-11			
8001-04-12			
8001-04-13			
8001-04-14			
8001-04-15			
8001-04-16			
8001-04-17			
8001-04-18			
8001-04-19			
8001-04-20			
8001-04-21			
8001-04-22			
8001-04-23			
8001-04-24			
8001-04-25			
8001-04-26			
8001-04-27			
8001-04-28			
8001-04-29			
8001-04-30			
8001-05-01			
8001-05-02			
8001-05-03			
8001-05-04			
8001-05-05			
8001-05-06			
8001-05-07			
8001-05-08			
8001-05-09			
8001-05-10			
8001-05-11			
8001-05-12			
8001-05-13			
8001-05-14			
8001-05-15			
8001-05-16			
8001-05-17			
8001-05-18			
8001-05-19			
8001-05-20			
8001-05-21			
8001-05-22			
8001-05-23			
8001-05-24			
8001-05-25			
8001-05-26			
8001-05-27			
8001-05-28			
8001-05-29			
8001-05-30			
8001-05-31			
8001-06-01			
8001-06-02			
8001-06-03			
8001-06-04			
8001-06-05			
8001-06-06			
8001-06-07			
8001-06-08			
8001-06-09			
8001-06-10			
8001-06-11			
8001-06-12			
8001-06-13			
8001-06-14			
8001-06-15			
8001-06-16			
8001-06-17			
8001-06-18			
8001-06-19			
8001-06-20			
8001-06-21			
8001-06-22			
8001-06-23			
8001-06-24			
8001-06-25			
8001-06-26			
8001-06-27			
8001-06-28			
8001-06-29			
8001-06-30			
8001-07-01			
8001-07-02			
8001-07-03			
8001-07-04			
8001-07-05			
8001-07-06			
8001-07-07			
8001-07-08			
8001-07-09			
8001-07-10			
8001-07-11			
8001-07-12			
8001-07-13			
8001-07-14			
8001-07-15			
8001-07-16			
8001-07-17			
8001-07-18			
8001-07-19			
8001-07-20			
8001-07-21			
8001-07-22			
8001-07-23			
8001-07-24			
8001-07-25			
8001-07-26			
8001-07-27			
8001-07-28			
8001-07-29			
8001-07-30			
8001-07-31			
8001-08-01			
8001-08-02			
8001-08-03			
8001-08-04			
8001-08-05			
8001-08-06			
8001-08-07			
8001-08-08			
8001-08-09			
8001-08-10			
8001-08-11			
8001-08-12			
8001-08-13			
8001-08-14			
8001-08-15			
8001-08-16			
8001-08-17			
8001-08-18			
8001-08-19			
8001-08-20			
8001-08-21			
8001-08-22			
8001-08-23			
8001-08-24			
8001-08-25			
8001-08-26			
8001-08-27			
8001-08-28			
8001-08-29			
8001-08-30			
8001-08-31			
8001-09-01			
8001-09-02			
8001-09-03			
8001-09-04			
8001-09-05			
8001-09-06			
8001-09-07			
8001-09-08			
8001-09-09			
8001-09-10			
8001-09-11			
8001-09-12			
8001-09-13			
8001-09-14			
8001-09-15			
8001-09-16			
8001-09-17			
8001-09-18			
8001-09-19			
8001-09-20			
8001-09-21			
8001-09-22			
8001-09-23			
8001-09-24			
8001-09-25			
8001-09-26			
8001-09-27			
8001-09-28			
8001-09-29			
8001-09-30			
8001-10-01			
8001-10-02			
8001-10-03			
8001-10-04			
8001-10-05			
8001-10-06			
8001-10-07			
8001-10-08			
8001-10-09			
8001-10-10			
8001-10-11			
8001-10-12			
8001-10-13			
8001-10-14			
8001-10-15			
8001-10-16			
8001-10-17			
8001-10-18			
8001-10-19			
8001-10-20			
8001-10-21			
8001-10-22			
8001-10-23			
8001-10-24			
8001-10-25			
8001-10-26			
8001-10-27			
8001-10-28			
8001-10-29			
8001-10-30			
8001-10-31			
8001-11-01			
8001-11-02			
8001-11-03			
8001-11-04			
8001-11-05			
8001-11-06			
8001-11-07			
8001-11-08			
8001-11-09			
8001-11-10			
8001-11-11			
8001-11-12			
8001-11-13			
8001-11-14			
8001-11-15			
8001-11-16			
8001-11-17			
8001-11-18			
8001-11-19			
8001-11-20			
8001-11-21			
8001-11-22			
8001-11-23			
8001-11-24			
8001-11-25			
8001-11-26			
8001-11-27			
8001-11-28			
8001-11-29			
8001-11-30			
8001-12-01			
8001-12-02			
8001-12-03			
8001-12-04			
8001-12-05			
8001-12-06			
8001-12-07			
8001-12-08			
8001-12-09			
8001-12-10			
8001-12-11			
8001-12-12			
8001-12-13			
8001-12-14			
8001-12-15			
8001-12-16			
8001-12-17			
8001-12-18	</		

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED
DATE 08-22-2011 BY 60322 UCBAW/SJS/STP

1. The first of these is the fact that the
2. Government has not been able to secure the
3. necessary funds to carry out its policy.
4. This is due to the fact that the
5. Government has not been able to secure the
6. necessary funds to carry out its policy.
7. This is due to the fact that the
8. Government has not been able to secure the
9. necessary funds to carry out its policy.
10. This is due to the fact that the
11. Government has not been able to secure the
12. necessary funds to carry out its policy.

1905

Diagram illustrating a power supply system with two output voltages (12V and 5V) and their respective loads.

Transformer: 240V AC input, 0-250V secondary winding.

Rectifier: Bridge rectifier (4 diodes).

Filter: 1000µF capacitor.

Regulators: 12V regulator (7812) and 5V regulator (7805).

Outputs and Loads:

- 12V output connected to a 12V LED strip (12V 1A) and a 12V battery.
- 5V output connected to a 5V LED strip (5V 1A) and a 5V battery.

1947-1948 : ' .

1. The first of these is the fact that the United States has a large and growing population of people who are not citizens of the United States. This is a result of the large number of people who have immigrated to the United States in recent years, and the fact that many of these people are not naturalized citizens.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)